


NEW BENNETT® GRADE 2

CALLAN
Grade 2 Residential High Security

DIMENSIONS

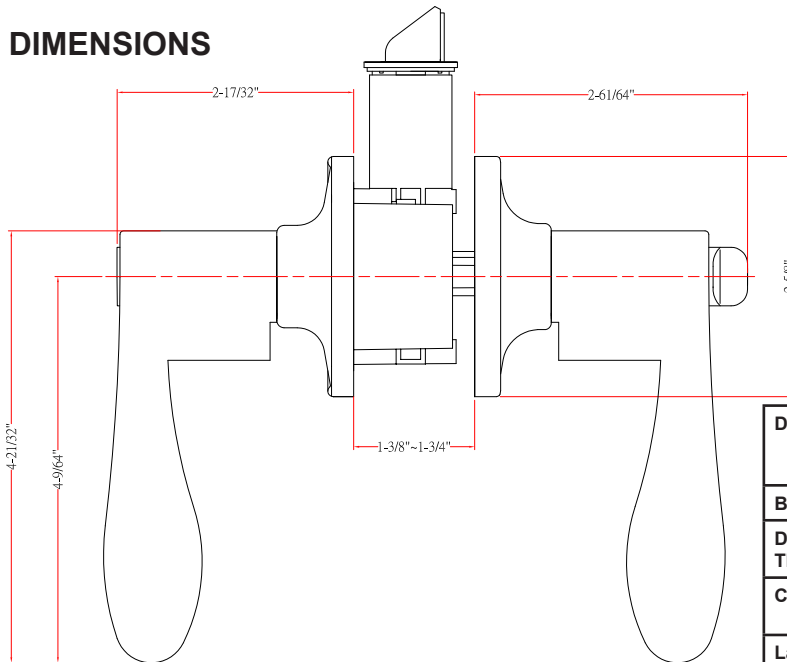


STANDARD SPECIFICATIONS

Door Prep	Cross bore: 2-1/8" Edge bore: 1" Latch face: 1" x 2-1/4"
Backset	Fits 2-3/8" and 2-3/4"
Door Thickness	1-3/8" ~ 1-3/4" door standard 2-1/4" Ext. Kit available
Cylinder	SC1 5-pin standard; KW1 5-pin optional Entries packed KA5
Latches	Entrance: 2-3/8" & 2-3/4" adjustable (9073) Passage/Privacy: 2-3/8" & 2-3/4" adj. (9074) Faceplate: 1" x 2-1/4" round corner Bolt: 1/2" throw
Strikes	1-3/4" x 2-1/4" full lip round corner (9103)
Wood Screws	Combination screws that suit both wood or metal door mounting
Door Handing	Reversible lever. Must be reversed before installation. Handing required for Dummy function & Handleset Interior.

Model	Function	WT/CTN	CTN QTY	Finish					
				US3 Bright Brass	US15 Satin Nickel	US10BE Edged Bronze	US5 Antique Brass	Black	
500T-BN-G2	Entrance	35 Lbs	10 Pcs	Item No.	G2BN5103	G2BN5101	G2BN5107	G2BN5105	G2BN5104
501T-BN-G2	Passage	23 Lbs	10 Pcs	Item No.	G2BN5013	G2BN5011	G2BN5017	G2BN5015	G2BN5014
502T-BN-G2	Privacy	24 Lbs	10 Pcs	Item No.	G2BN5023	G2BN5021	G2BN5027	G2BN5025	G2BN5024
515 - BN	Dummy	15 Lbs	20 Pcs	Item No.	BN5053	BN5051	BN5057	BN5055	BN5054
300T-BN-G2	Combo	55 Lbs	10 Pcs	Item No.	—	G2BN3001	G2BN3007	—	G2BN3004

FUNCTIONS

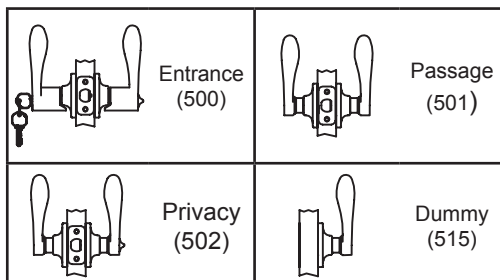

Extension Kits Available

DELANEY

Copyright © DELANEY HARDWARE. All rights reserved.

HANDING GUIDE

